

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
30 June 2005 (30.06.2005)


PCT

(10) International Publication Number  
**WO 2005/059468 A1**

- (51) International Patent Classification<sup>7</sup>: **F41H 5/04**
- (21) International Application Number:  
PCT/EP2004/052585
- (22) International Filing Date: 20 October 2004 (20.10.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
03104694.9 15 December 2003 (15.12.2003) EP
- (71) Applicant (for all designated States except US): **NV BEKAERT SA** [BE/BE]; Bekaertstraat 2, B-8550 ZW-EVEGEM (BE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LEFEBVRE, Lieven** [BE/BE]; Waterstraat 44, B-8710 WIELSBEKE (BE). **HERMANS, Patrick** [BE/BE]; Schaliënhofstraat 42, B-8570 VICHTE (BE).
- (74) Agent: **MESSELY, Marc**; Bekaertstraat 2, B-8550 ZW-EVEGEM (BE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: BALLISTIC RESISTANT PAD WITH METAL CORD

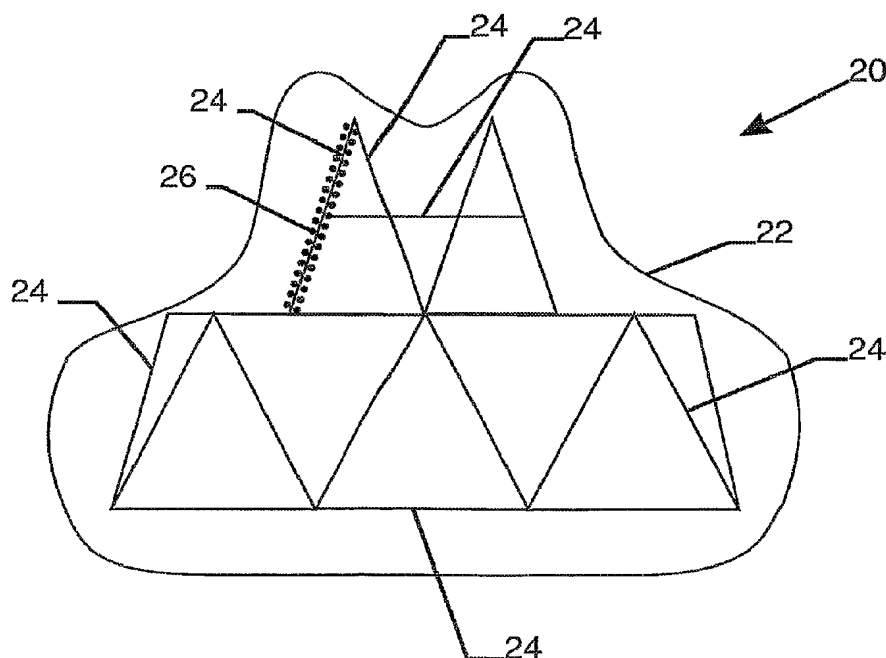

(57) Abstract: A ballistic resistant pad (20) for use in protective textile or the like comprises one or more sheets (22) of high-strength fibers, and a plurality of elongated metal elements (24). The metal elements (24) are bonded to at least one of the sheets (22) so as to give to the pad (20) a degree of resiliency to come back close to its original form after a local impact.



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*